

APPLICABLE SCENE

Villa



Commodity Housing



Country House












Continuous Heating

Hien

Real-time control of hot and cold water in and out



Adhesive Layer

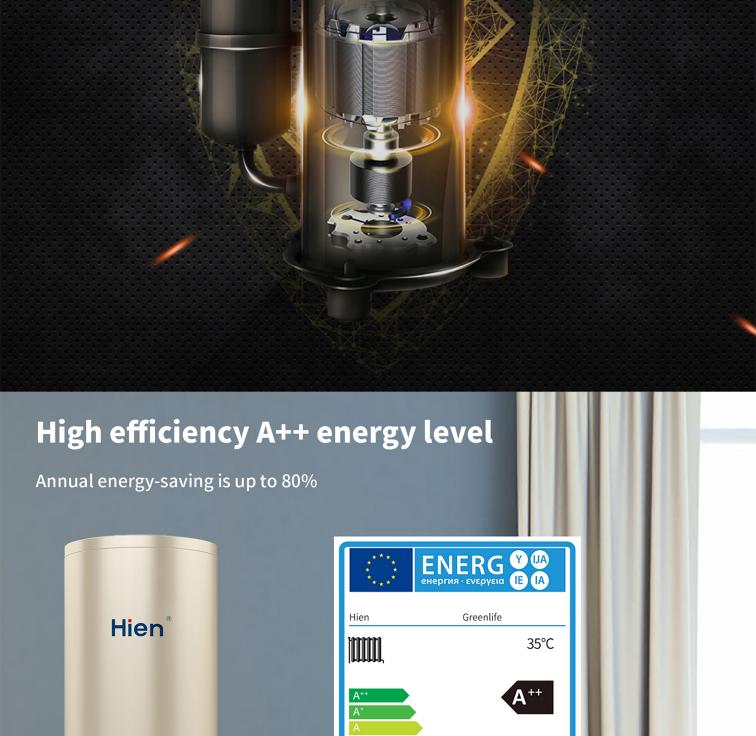

SPECIFICATIONS

	Water tank parameters			Host Parameters			
	Product number	LY150-70TWB01-01	LY200-70TWB01-01	Machine model	KF70/B01	Nominal water production	70L/h
	Rated volume	150L	200L	power supply	220V- 50Hz	Maximum working pressure of high/low pressure side	3.0/3.0MPa
	Tank size	500x1350 (mm)	500x1700 (mm)	Anti-shock level	Class I / IPX4	Discharge/suction side allows working overpressure	3.0/0.75MPa
	The refrigerant	R32	R32	Nominal heating capacitypower	3300W/805W	The maximum pressure of the	3.0MPa
	Tank color	Light gold	Light gold	consumption Coefficient of Performance		evaporator	4
	Tank weight	49kg	60kg	(COP)	4.10W/W	Noise	≤50dB(A)
	Water tank rated pressure	0.7Mpa	0.7Mpa	Nominal working current	3.66A	Refrigerant charge	R22 0.73kg
1	Overpressure allowed	0.8Mpa	0.8Mpa	Maximum power consumption/working current	1150W/5.2A	Dimensions	780x320x540(mm)
P	Maximum Working Pressure	3.0Mpa	3.0Mpa	Nominal/maximum outlet water temperature	55°C/60°C	Net weight	27kg
-							The same of the same of

Hien